BACKHOE LOADER 3CX/4CX/5CX







GROSS POWERMAXIMUM DIG DEPTHOPERATING WEIGHT55 - 81kW (74-109hp)6.51m7887 - 9500kg

LOADING MADE EASY.

Load material with single lever control, using the 6-in-I function for easy shovel operation. New F-N-R switch quickly lets you change machine direction.



LOAD A LORRY IN UNDER 5 MINUTES



Large capacity shovel and autoshift transmission increase efficiency. Return to Dig feature

automatically resets the shovel to level.

MOVING MATERIAL MADE EASY.

The 1.3m³ shovel makes handling easy. Auto smooth ride system avoids spillages, whilst roof and quick hitch mounted camera system improves visibility to the forks.





HALVE YOUR COSTS

Move materials up to 25% quicker with 50% less $C0_2$ and fuel than an 8T excavator and dumper.

GRADING MADE EASY.

2.3m wide 6-in-1 shovel delivers outstanding levelling and grading. New return to grade feature quickly positions the shovel to the optimum angle for fast, easy grading.



COMPLETE PERFORMANCE The 4CX can level and grade 50 tonnes of stone 63% quicker, using 73% less fuel than a 13-tonne excavator.



ROADING MADE EASY.

Drive to site without the cost of a lorry, while 6-speed Autoshift transmission with TorqueLock as standard reduces travel times by up to 10% and saves fuel.






OFF-ROAD PERFORMER

Off-road, enjoy fast movement around site compared to tracked machines with less damage to kerbs and roads.

EXCAVATING MADE EASY.

Excavate up to 190 tonnes per hour with the capability to fit large capacity buckets up to 0.48 m³, while an extending dipper enables exceptional reach to 7.7m.

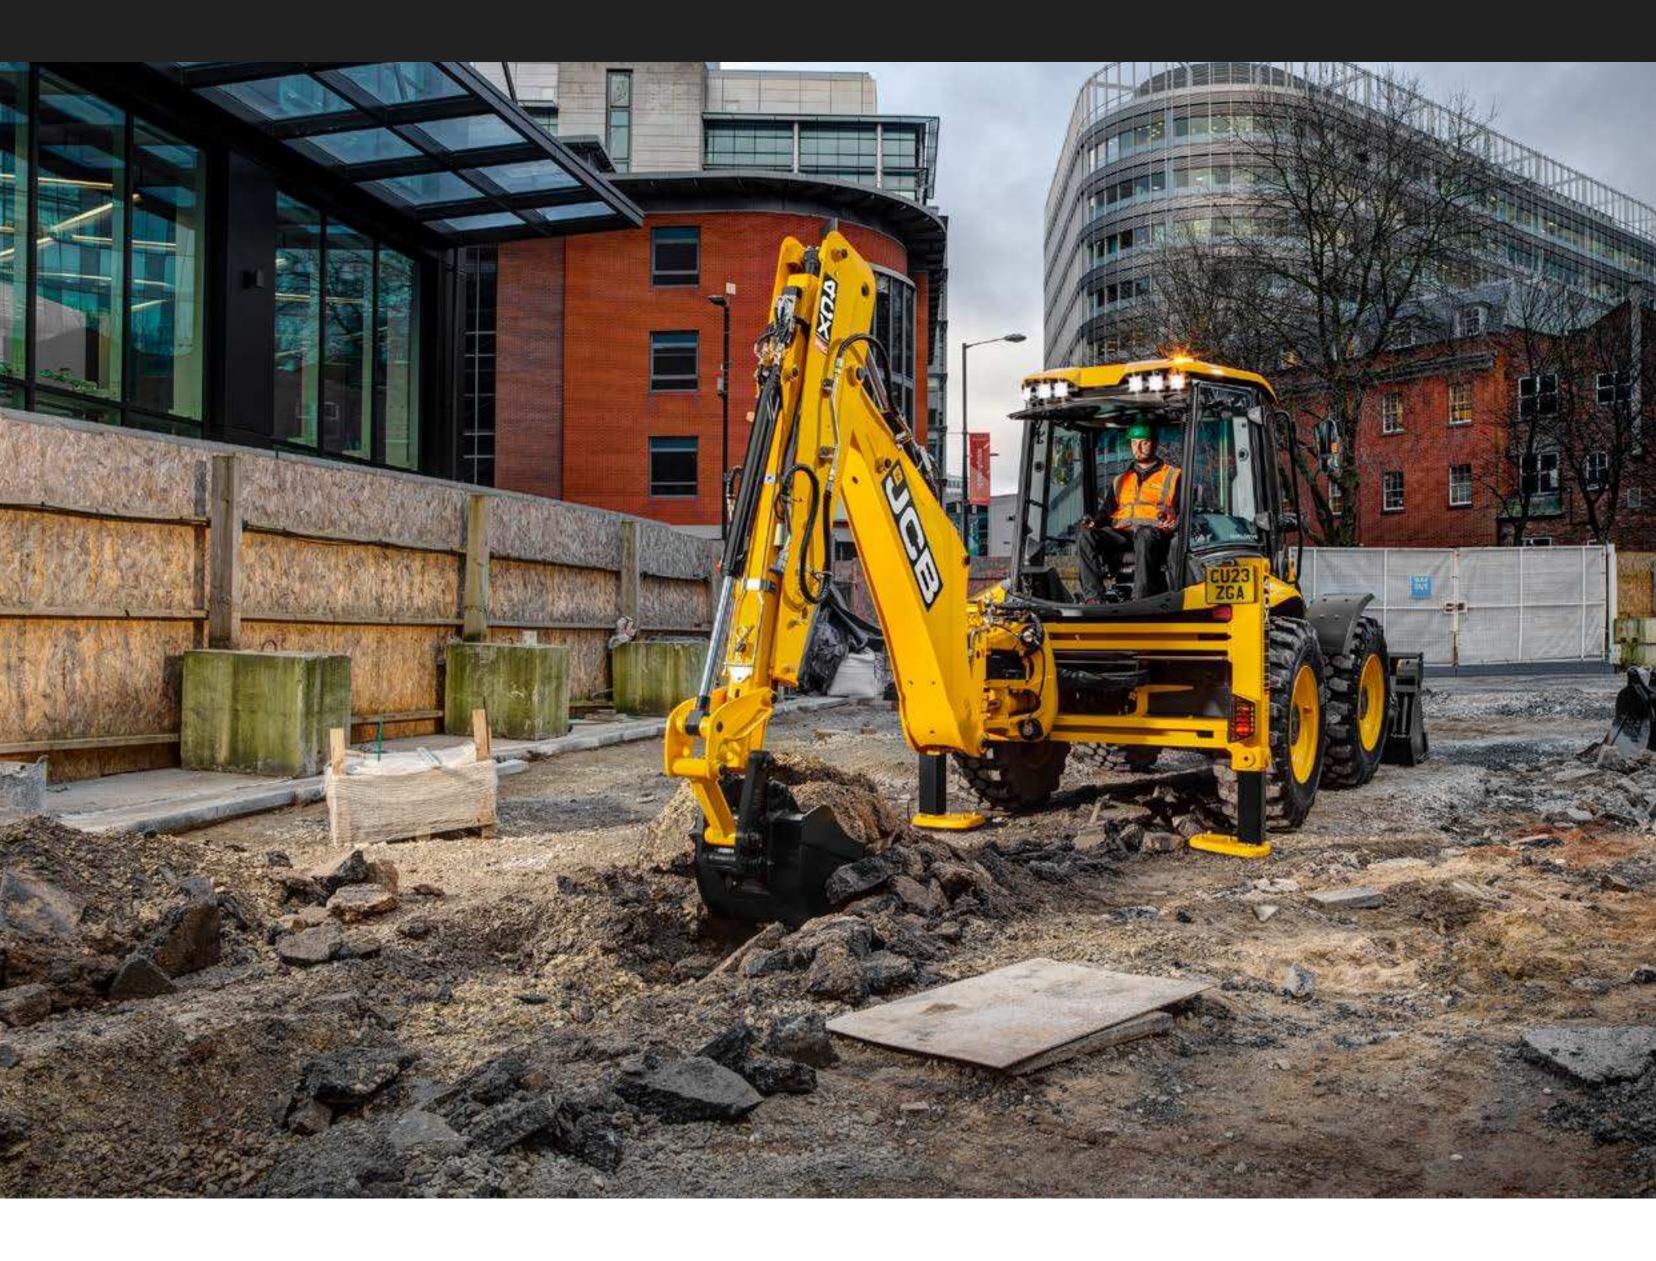





FAST REPOSITIONING



Innovative DUALDRIVE controls enable machine repositioning when using the excavator, without turning the seat. Powerslide hydraulically re-positions the excavator.

VERSATILITY MADE EASY.

Multifunction with one machine by using the excavator mounted breaker alongside the loader shovel to quickly break and move material with no attachment changeover.







UNRIVALLED VERSATILITY

A wide range of attachments can be fitted to the loader and excavator auxillary hydraulics for greater versatility.


BACKHOE LOADER 3CX/4CX/5CX



SPECIFICATION.

Model	3CX	3CX PLUS	3CX PRO	4CX PLUS	4CX PRO	5CX PRO
Engine	JCB 3.0L	JCB 4.8L				
Power	55kW	8lkW	8lkW	72kW	8lkW	8lkW
Torque	440Nm	516Nm	516Nm	450N m	516Nm	516Nm
Transmission	6 speed Autoshift TorqueLock + LSD					
Excavator	l4ft Fixed / ExtraDig	14ft ExtraDig	14ft ExtraDig	14ft ExtraDig	14ft ExtraDig	15ft ExtraDig
6 in I shovel	1.0m ³	1.0m ³	1.0m ³	1.0m ³	I.2m ³	I.3m ³
Wheels	18"/20" (front) 26" rear	18"/20" (front) 26" rear	18"/20" (front) 26" rear	24"	28"	28"
Air con	Optional	Optional	Standard	Optional	Standard	Standard
Speed	40kph	40/50kph	40/50kph	40kph	40kph	40kph

Models and specification may not be available in all countries.

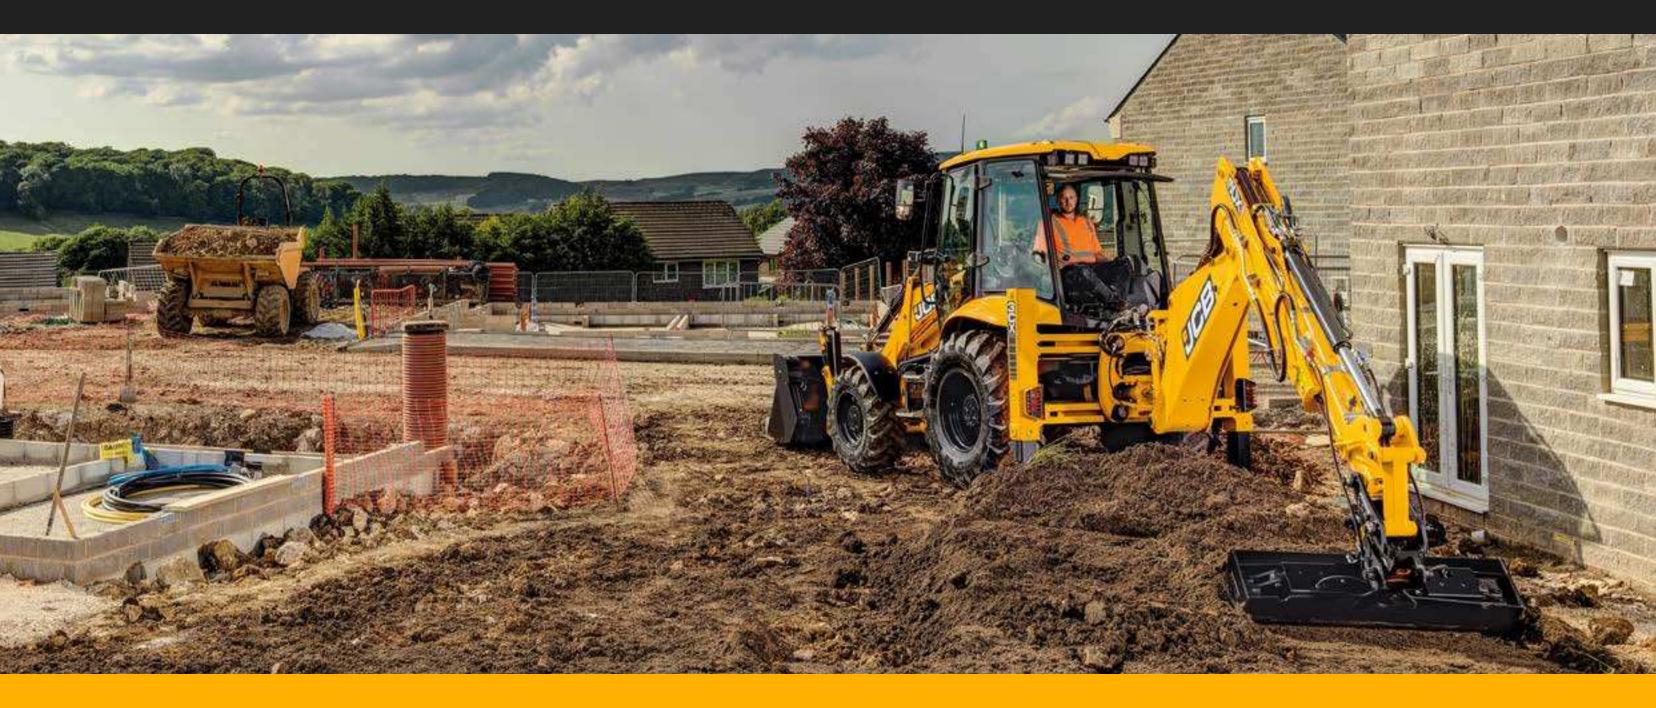

STANDARD FEATURES.

- Single loader lever with F-N-R Return to dig
- 6-speed Autoshift transmission
 Auto SRS
 - & Torquelock
- Shovel mounted forks
- Shovel ram guards
- Return to grade (Servo only)
- 7" LCD display screen
- Handsfree Bluetooth radio
- LED worklights & roof beacons



MADE EASY – JCB 3CX/4CX/5CX

FIND OUT MORE

REQUEST A QUOTE



www.jcb.com

31545 / en-GB / Issue I

©2024 J C Bamford Excavators Ltd.